

7530 Series Radar Tank Gauges

Continuous and non-contact precision level measurement with an accuracy rate of ± 0.5 mm.




Highlights

- Cost-effective intrinsically safe — 4-wire cable for HART and 24 VDC i.s. power.
- Easy on-site operation using built-in display.
- Easy commissioning and diagnostics using Windows® based software.
- Inventory control version with available (± 3 mm) accuracy.
- National approvals (MNI, PTB) for custody transfer.

7530 RTG with Horn Antenna

It is essential to evaluate the right antenna type for the RTG application.

The 7530 RTG with horn antenna is suitable for free space applications that disallow the use of a parabolic antenna due to tank/nozzle geometry. It is essential that the horn extends below the nozzle. The general rule for diameter selection is "the larger, the better" as a larger aperture of the antenna generates a narrower beam and has a better gain – signal to noise (S/N) ratio.

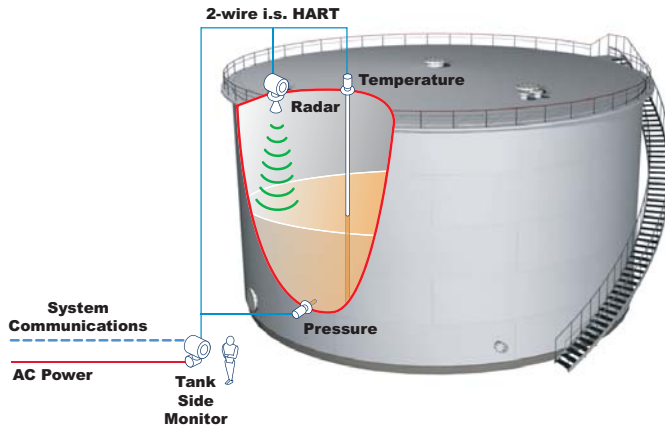

Example Tank Gauging System

Product Options

Approvals & Certifications

- FM, CSA
- Contact Varec for ATEX or IECEx approved devices

Antenna

- Various Sizes and Material Types

Process Connections

- DN, & RF

Output Options

- HART

Gland Entry

- Metric, NPT, G

Accuracy

- High Accuracy, Inventory Control or NMI/PTB Approved

Technical Specifications

Note! This product conforms to all applicable industry standards and approvals, such as climate class, electromagnetic (EMC), vibration and radio frequency (RF). See product installation manual.

Note! These specifications apply to the 7230 RTG under reference operating conditions with no major interference reflections inside the signal beam.

Note:

Please complete an Application Data Sheet for this equipment to facilitate proper selection of options for your unique application.

Contact your Varec Sales Representative for more information.

Maximum Measured Error	Free space: ± 0.5 mm Stilling well: ± 0.8 mm
Power Consumption	Max. 330 mW at 16 V, Max. 500 mW at 24 V, Max. 600 mW at 30 V
Current Consumption	Max. 21 mA (50 mA inrush current)
Weight	7.1 kg (15 lb 7 oz) plus weight of the flange
Enclosure	IP 65, NEMA 4X (IP20, NEMA 1 with open housing and removed liquid crystal display) Housing T12: aluminium, seawater repellent, chromate, powder coated
Antenna	IP 68 (NEMA 6P)
Conduit entries	Cable gland: M20x1.5; Pg 13.5 (gland included) 3/4 NPT: G 3/4 internal thread
Ambient Temperature	-40°F and +185 °F (-40 °C and +5 °C)
Approvals CE approval RF approvals - R&TTE, FCC Marine certificate - GL (Germanisch Lloyd), ABS, NK Factory Mutual - IS Class I,II,III, Div 1 Groups A-G T* Class 1, Zone 0, AEx ia IIC T* DIP Class II,III, Div 1 Groups E,F,G T* NI Class I, Div 2 Groups A-D T* XP-IS Class 1, Div. 1 Groups A-D T* XP Class 1, Zone 0, IIC T* Antenna Class 1, Zone 0, AEx ia IIC T* CSA - Exn IIC Class 1 Zone 2, Exd [ia] IIC Zone 1/0, Ex ia IIC Class 1 Zone 0	



Varec, Inc., 5834 Peachtree Corners East, Peachtree Corners (Atlanta), GA 30092 USA

Tel: +1 (770) 447-9202 | Toll Free: +1 (866) 698-2732 | Fax: +1 (770) 662-8939 | www.varec.com

2015 © Varec, Inc. All Rights Reserved. This document is for information purposes only. Varec, Inc. makes no warranties, express or implied, in this summary. The names of actual companies and products mentioned herein may be the trademarks of their respective owners.

Document Code: TEC071GVAE1615